


WETGZ-24/250

250A Apparatus Bushing

Features

- Manufactured from high quality epoxy resin
- Meeting requirements of EN 50180 & EN 50181 type A
- 100% factory tested
- Tested in compliance with GB/T 4109 (IEC60137 6.0)

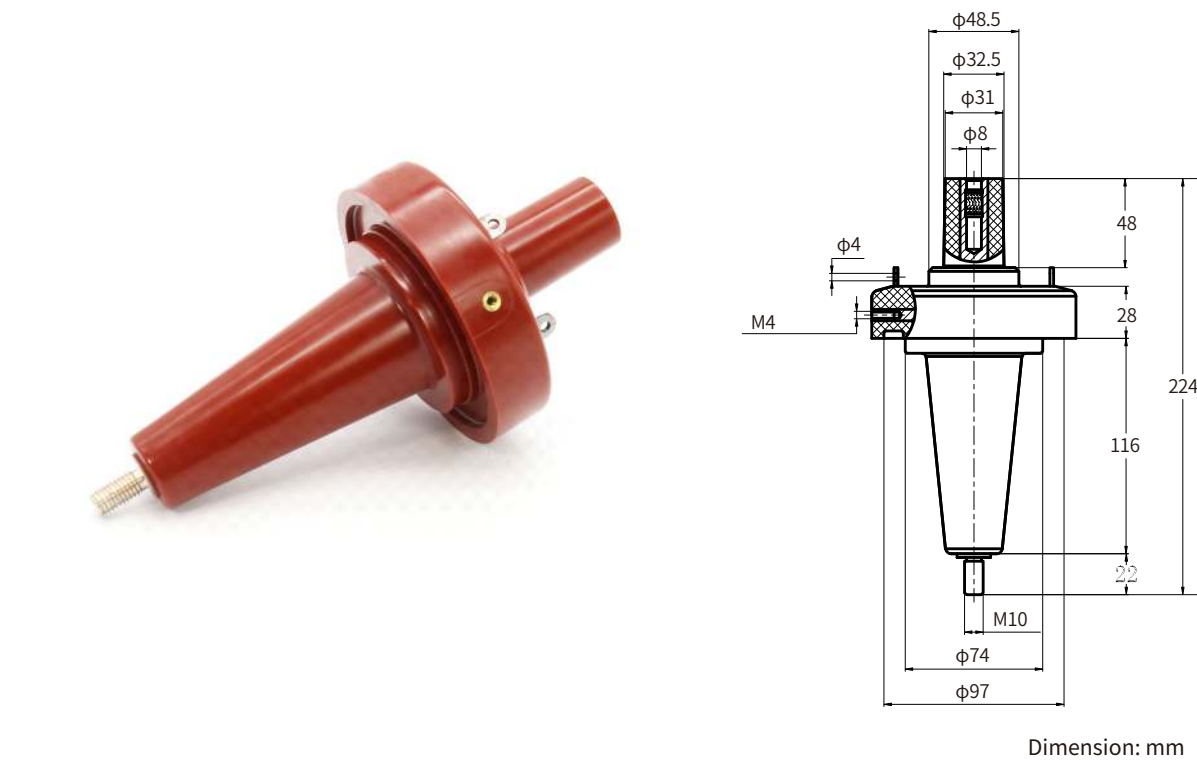

Technical Data


Voltage Class	12kV	24kV
Continuous Current	250A	250A
AC Withstand Voltage	42kV for 1min	65kV for 1min
Partial Discharge	13.2kV, ≤ 10 pC	26.4kV, ≤ 10 pC
Impulse Withstand Voltage (10 times for each polarity)	75kV	125kV

WEATG-CQ12/250

250A Apparatus Bushing

Features

- Manufactured from high quality epoxy resin
- Meeting requirements of EN 50180 & EN 50181 type A
- 100% factory tested
- Tested in compliance with GB/T 4109 (IEC60137 6.0)

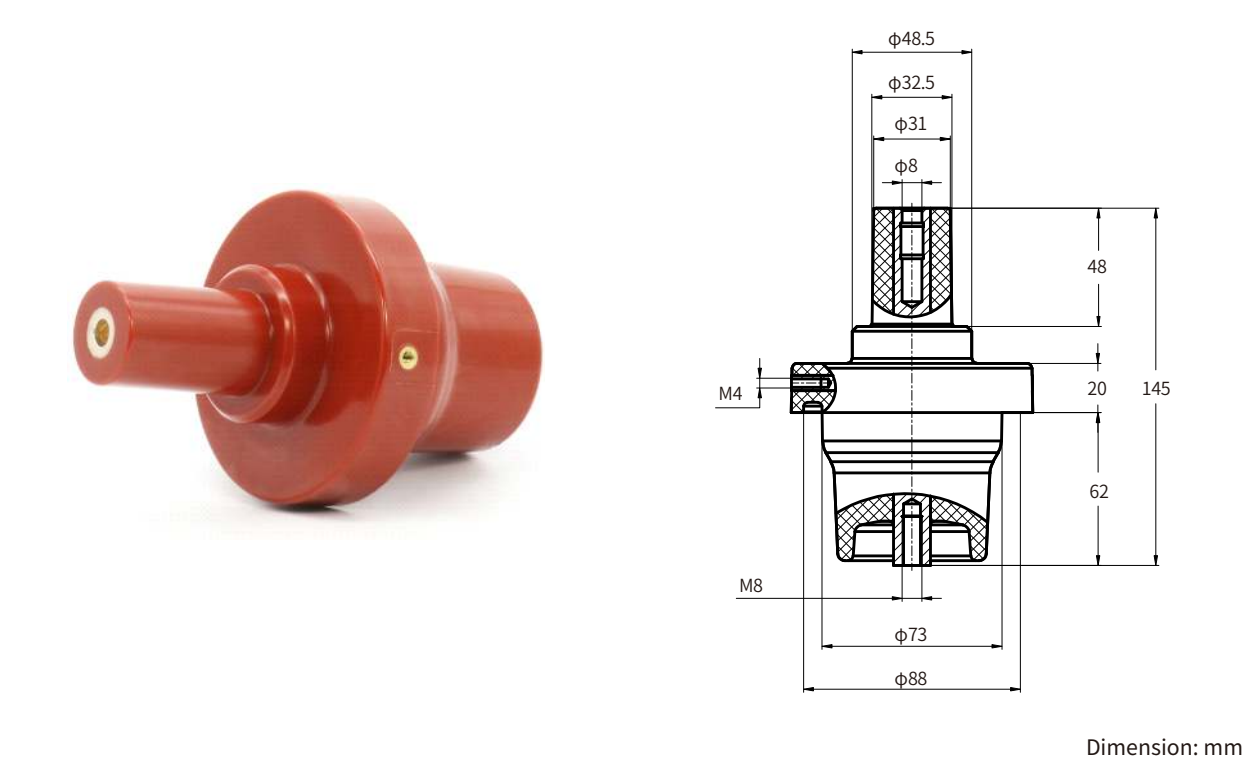

Technical Data

Voltage Class	12kV
Continuous Current	250A
AC Withstand Voltage	42kV for 1min
Partial Discharge	13.2kV, ≤ 10 pC
Impulse Withstand Voltage (10 times for each polarity)	75kV