

630A Apparatus Bushing


Features

- Manufactured from high quality epoxy resin
- Meeting requirements of EN 50180 & EN 50181 type C
- 100% factory tested
- In compliance with GB/T 4109 (IEC60137 6.0)


Design




Apparatus Bushing in SF6
Part No. WECTG-CQ/182

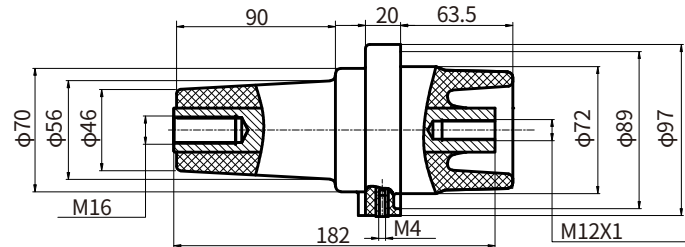

Apparatus Bushing in SF6
Part No. WECTG-CQ/202

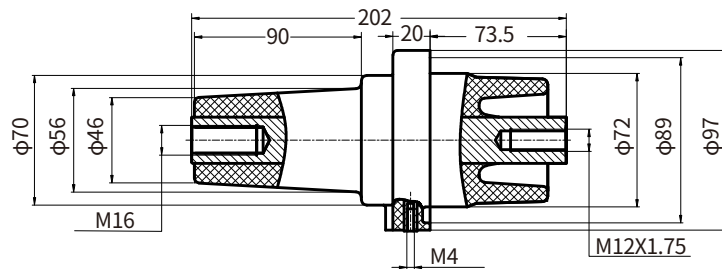

Feed-thru Apparatus Bushing
Part No. WECTG-ST

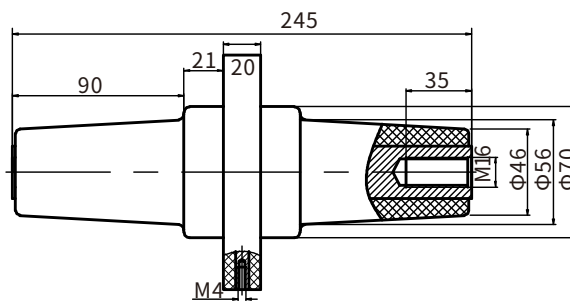

Dimension: mm

Technical Data

Voltage Class	12kV		24kV	
Continuous Current	630A	1250A*	630A	1250A*
AC Withstand Voltage	42kV for 1min		65kV for 1min	
Partial Discharge	15kV, ≤10pC		28.8kV, ≤10pC	
Impulse Withstand Voltage (10 times for each polarity)	75kV		125kV	

Note: * refer to that current rating shall be clearly specified when order as both bushing dimension varies.