

MOA Separable Arrester for WEB(K) 24/630

Application

MOA arrester can provide protection for electrical components up to 20kV, such as transformers, equipments, cable and accessories, which may subject to over voltage and transients resulting from lightning and switching.

Designed to comply with the bolted-type Tee connector WEB 24/630 and tested in compliance with IEC 60099.4-2006, JB/T 8952.

Design

1. Connecting Interface

Interface designed to fit with the Tee connector WEB(K) 24/630

2. Internal Screen

Moulded EPDM conductive rubber to control electrical stress

3. External Screen

Moulded EPDM conductive rubber ensure the connector touchable

4. Insulation

Moulded EPDM insulating rubber to ensure excellent electrical properties

5. Copper Connecting Pipe

Connect the lugs between cable and surge arrester

6. Surge Arrester


Metal oxide valve elements.

7. Earth connection

The surge arrester is connected to the earth by an earth braid that manages short circuit currents.

8. Earth Lead

Earth the external screen

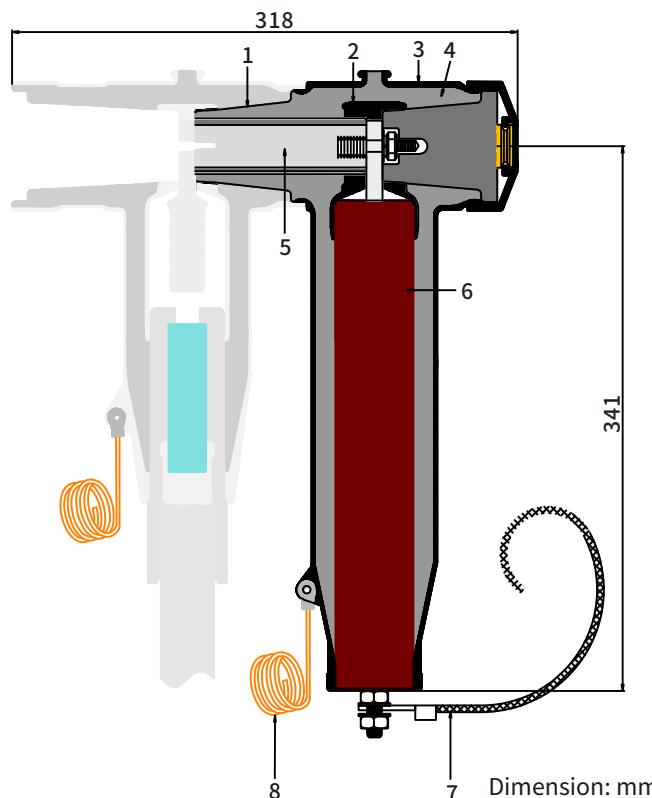

Technical Data

Item	WEBK YH5WZ-26/66	WEBK YH5WZ-32/85	WEBK YH5WX-34/90	WEBK HY5ZW-34/85
System Nominal Voltage(kV)	20	20	20	20
Rated Voltage(kV)	26	32	34	34
Continuous Operation Voltage (kV)	20.8	25.6	27.2	27.2
Nominal Discharge Current(KA)	5	5	5	5
Steep Current Impulse Residual Voltage (kV)	≤76	≤95	≤104	≤95
Lightning Impulse Residual Voltage(kV)	≤66	≤85	≤90	≤85
Switching Impulse Residual Voltage(kV)	≤56	≤75	≤80	≤75
Long Duration Current Impulse Withstand(A)	150	150	150	200
High Current Impulse Withstand (kA)	65	65	65	65