

WEETG-ST 630A Apparatus Bushing


Features

- Manufactured from high quality epoxy resin
- Meeting requirement of EN 50180 & EN 50181 type E
- 100% factory tested
- In compliance with GB/T 4109(IEC60137 6.0)

Design



Feed-thru Apparatus Bushing
Part No. WEETG-ST

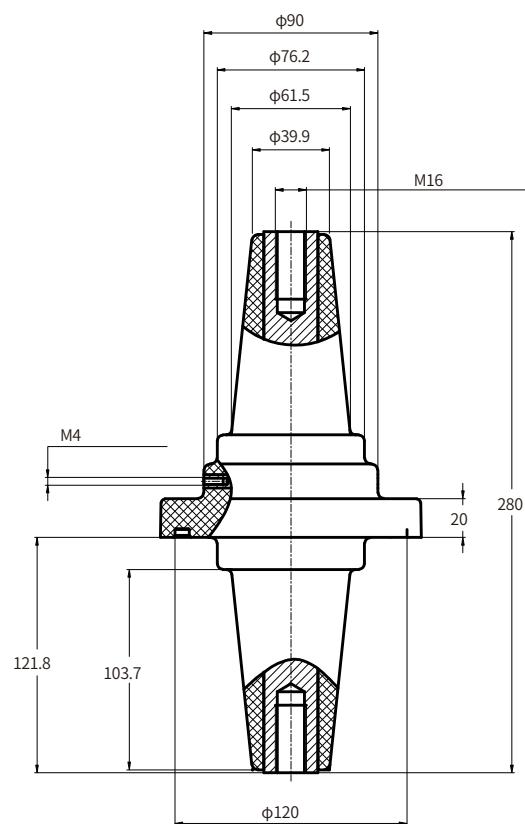

Dimension: mm

Technical Data

Voltage Class	40.5kV	
Continuous Current	630A	1250A*
AC Withstand Voltage	95kV for 1min	
Partial Discharge	45kV, $\leq 10\text{pC}$	
Impulse Withstand Voltage (10 times for each polarity)	200kV	

Note: * refer to that current rating shall be clearly specified when order as both bushing dimension varies.