



Inner Cone Plug-in Serial up to 42kV

Termination

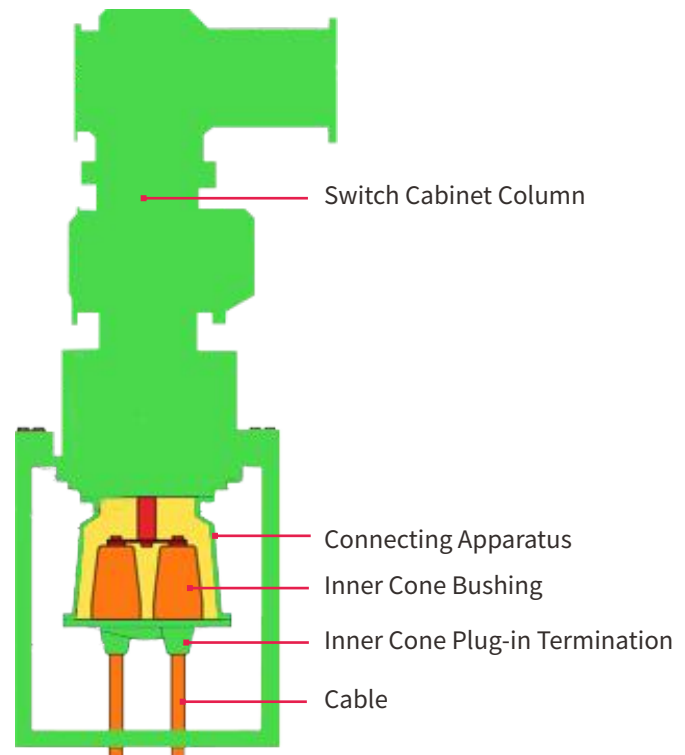


- Conforming to EN 50181&50180
- Dry interface
- Premould stress control cone of silicone rubber with 100% factory tested
- Tested according to IEC 60502
- Metal protective shell on tail to provide great mechanical protection and fully shielding
- Adopting integral compression structure of tail tube and spring to ensure enough interface force between the stress control cone and bushing
- Suitable for indoor& outdoor condition mated with C-GIS or transformers

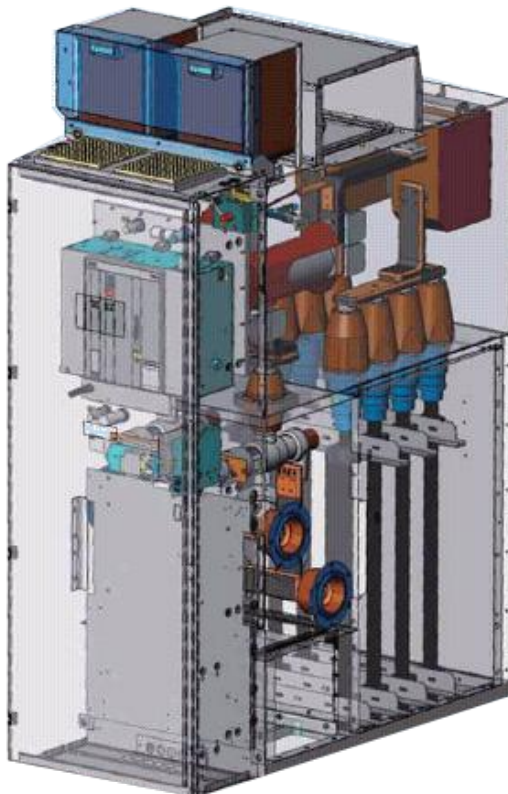

Application

Designed Profile

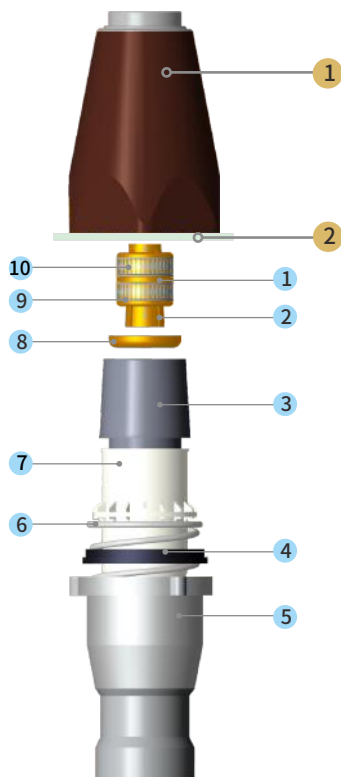

Insulated Bushing

- 1 Inner Cone Insulated Bushing
- 2 Flange

Inner Cone Plug-in Termination

- 1 Wedge-shaped Cylinder
- 2 Bite-wire Tool
- 3 Premould Stress Cone
- 4 Gasket
- 5 Tail Tube
- 6 Non-magnetic Spring
- 7 Supporting Tube
- 8 Check Sleeve
- 9 Clamp Ring
- 10 Conductive Strip

Technical Data

Item		Main Body		
		1#	2#	3#
Rated Current	A	630	800	1250
Maximum System Voltage(U_m)	kV	36	42	42
AC Withstand Voltage	50Hz, for 5min (kV)	81	117	117
Partial Discharge	$1.73U_0$	$\leq 10\text{pC}$	$\leq 10\text{pC}$	$\leq 10\text{pC}$
Impulse Withstand Voltage (10 times for each polarity)	1.2/50 μs (kV)	170	200	200
Maximum Short-time Current Withstand	1sec(kA)	31.5	40	50

Selection Table

Rated Voltage	Main Body	Core Number	Part No.
26/35kV	3#	3	35kV WCBN-3-3×50~630
		1	35kV WCBN-3-1×50~800
	2#	3	35kV WCBN-2-3×50~185
		1	35kV WCBN-2-1×50~185
27.5kV	3#	1	27.5kV WCBN-3-1×150~400
18/30kV	3#	3	30kV WCBN-3-3×35~630
		1	30kV WCBN-3-1×35~800
	2#	3	30kV WCBN-2-3×35~185
		1	30kV WCBN-2-1×35~185
12/20kV	3#	3	20kV WCBN-3-3×35~630
		1	20kV WCBN-3-1×35~800
	2#	3	20kV WCBN-2-3×35~185
		1	20kV WCBN-2-1×35~185
6/10, 8.7/10 or 8.7/15kV	3#	3	10kV WCBN-3-3×35~630
		1	10kV WCBN-3-1×35~800
	2#	3	10kV WCBN-2-3×35~185
		1	10kV WCBN-2-1×35~185

Note: The final determination factor is the cable insulation diameter.