
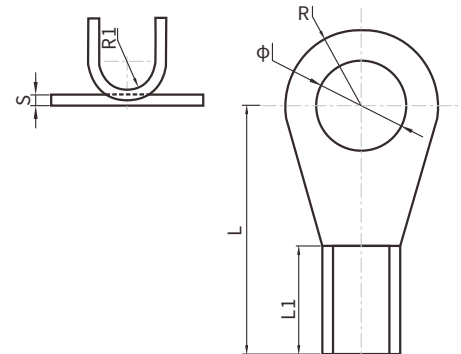


OT Series Cu Open Lug

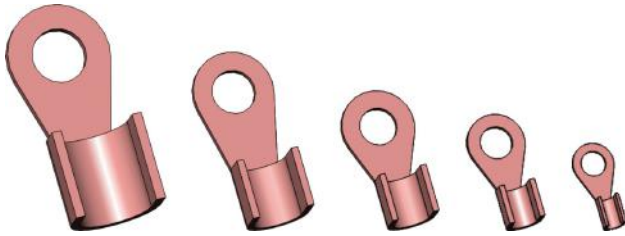

Application

Suitable for the connection of copper conductors in distribution equipment, mostly used in grounding of metal wire shield of cables.

Product Model	Dimension(mm)					
	L	L1	S	R	R1	Φ
OT-3A	11.5	5	0.5	3.5	1.3	4.2
OT-5A	12.5	5.4	0.6	4.2	1.75	5.2
OT-10A	15	6	0.8	4.7	2	5.2
OT-20A	17	7.4	1	5.5	2.5	6.2
OT-30A	18	8.2	1.1	5.8	3.2	6.2
OT-40A	20	9	1.1	6.1	3.5	6.2
OT-50A	21.5	9	1.2	6.3	3.7	6.2
OT-60A	23	10.5	1.3	7.2	4	8.2
OT-80A	25.5	11	1.4	8	4.5	8.2
OT-100A	29	12	1.5	8.5	5	8.2
OT-150A	31	12.4	1.6	9	5.5	10.4
OT-200A	33	14	1.7	10	6	10.4
OT-250A	36	15.5	1.8	10.5	6.5	10.4
OT-300A	40	17	2	11.5	7	12.4
OT-400A	43	18	2.2	13	8	14.4
OT-500A	46	20	2.4	14.5	8.5	14.4
OT-600A	50.5	23	2.7	16	10.5	16.5
OT-800A	60	30	3.2	17.5	12.5	18.5
OT-1000A	66	33	3.6	20.5	15.5	18.5